


# DROP 20 MINI CON ALETTE

cod. ASDROMINAL

**EN** Top range automatic drop down seal with 20mm maximum drop, sound insulation up to 50dB, which is easily fixed with screws on the lateral wings.

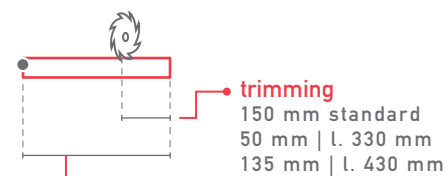

### trimming

150 mm standard  
50 mm | l. 330 mm  
135 mm | l. 430 mm

### lengths


330 430 530 630 730 830 930 1030 1130  
1230 1330 1430 1530 1630 1730 1830 mm

### certification



File nr. R39141

### application





TIMBER  
DOOR




SECURITY  
DOOR

### plunger type

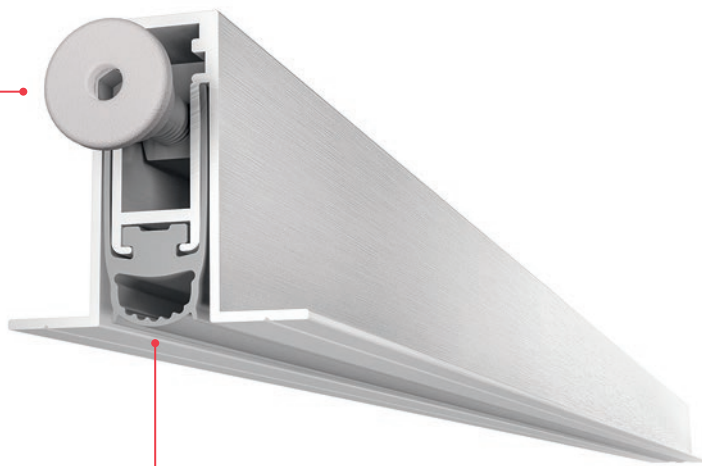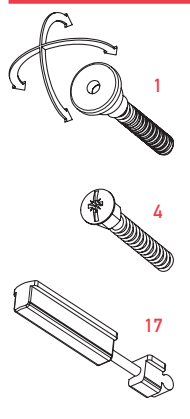

### size 13x30 mm

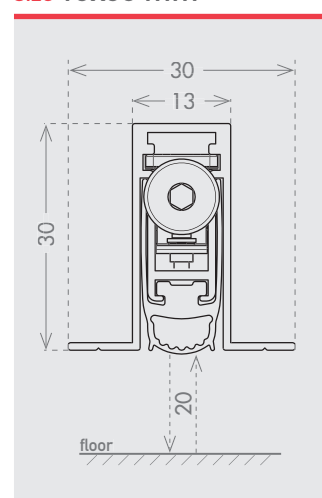

### seals

HF2



SIL


50 dB Rw



UL 10C  
File nr. R39141

### fixing type

5F




### closing plug included



### optional

Z2



**DOUBLE PLUNGER KIT** cod. ACKITDP p. 152

**ACTUATOR PIVOT** cod. ACAPIV p. 153

**IT** Guarnizione automatica sottoporta di alta gamma con corsa fino a 20mm, abbattimento acustico fino a 50dB, che si fissa semplicemente con delle viti sulle alette laterali.

**DE** Automatische Top-Untertürdichtung mit Hub bis 20 mm, Schalldämmung bis 50 dB, mit Schrauben einfach an den Seitenflügeln zu befestigen.

**FR** Plinthe automatique aux caractéristiques de haut niveau avec une course du joint de 20mm, une atténuation acoustique de 50 dB et qui se fixe simplement avec des vis sur le profil Omega.

**ES** Burlate automático de alta gama con desplazamiento de la junta hasta 20 mm y propiedad de aislamiento acústico hasta 50 dB, con fijación mediante tornillos en las aletas laterales.

**RU** Автоматически выпадающий уплотнитель высшего ценового сегмента с ходом до 20 мм, который обеспечивает снижение уровня шума до 50 дБ и просто крепится при помощи винтов на боковых фланцах.